## **Small Instrumentation Modules**

SIM910 and SIM911 — Voltage preamplifiers

- 4 nV/ $\sqrt{\text{Hz}}$  input noise (SIM910)
- 1.8 nV/ $\sqrt{\text{Hz}}$  input noise (SIM911)
- · Low output noise
- · 1 MHz bandwidth
- · Selectable gain from 1 to 100
- · AC or DC coupled
- Differential or single-ended input
- · 85 dB CMRR



## SIM910 JFET and SIM911 BJT Voltage Preamplifiers

The SIM910 and SIM911 are low-noise, programmable preamplifiers which are ideal for a wide range of small signal applications. The primary differences between the two models are their input impedance and input noise. The SIM911 has a bipolar junction transistor front-end, offers lower input noise, and has a 100 k $\Omega$  front-end impedance. The low bias current and 100  $M\Omega$  input impedance of the SIM910, which has a JFET front-end, make it a better choice for use with high impedance sources.

Both modules maintain very low output noise resulting in exceptional overall noise performance—even at low gain levels. The bandwidth of these preamplifiers is independent of gain setting so waveforms do not change shape as the gain is varied. Dual parallel outputs (one front and one rear) provide flexibility in cabling.

Inputs can be configured as differential (A–B), single-ended (A), or internally grounded, and can be either AC or DC coupled.

Additionally, the BNC input shields can be floated, avoiding spurious ground loops when measuring remote signals.

The digital control circuitry in the SIM910/911 is designed with a special clock-stopping architecture in which the microcontroller is turned on only when settings are being changed. This guarantees that no digital noise can contaminate low-level analog signals. Settings may be changed from the front panel or through the remote interface. All instrument settings can also be queried via the remote interface. The module generates a status signal to alert the user of an overload condition. Both the SIM910 and SIM911 can be operated outside the SIM mainframe by powering them with their required DC voltages.

www.gmp.ch

GMP SA Main office: Avenue des Baumettes 17 C

GMP SA Büro Zürich: Dübendorfstrasse 11a

CH -1020 Renens

Tél. 021 633 21 21

Fax. 021 633 21 29

info@gmp.ch

CH-8117 Fällanden

Tel. 044 825 34 00

Fax. 044 825 34 01

info@gmp.ch

## SIM910 and SIM911 Specifications

Frequency range DC to 1 MHz

1 to 100 (1-2-5 sequence) Gain  $\pm 0.5 \%$  (DC to 100 kHz), Gain accuracy ±5 % (<1 MHz)

Gain stability 200 ppm/°C

Input noise (typ.) SIM910

4 nV/√Hz @ 1 kHz SIM911 1.8 nV/√Hz @ 1 kHz

Input impedance

SIM910  $100 \text{ M}\Omega$  // 35pF $100 \text{ k}\Omega \text{ // } 35 \text{ pF}$ SIM911

Input bias current

SIM910 0.5 pA (typ.), DC coupled SIM911 4 μA (typ.), DC coupled

AC coupling (-3dB)

SIM910  $16 \, \mathrm{mHz}$ SIM911 0.7 Hz

Input selection A, A-B or GND Input coupling AC or DC Input shields Floating or ground ±1 V differential Maximum input ±5 V common mode

Maximum output ±10 V

85 dB @ 1 kHz **CMRR** 


0 °C to 40 °C, non-condensing Operating temperature Interface Serial via SIM interface Connectors BNC (3 front, 1 rear) DB15/M SIM interface

Power +5 VDC (100 mA max.), ±15 VDC (300 mA max.)  $1.5" \times 3.6" \times 7.0"$  (WHD) Dimensions

Weight 1.5 lbs.

Warranty One year parts and labor on defects

in materials and workmanship

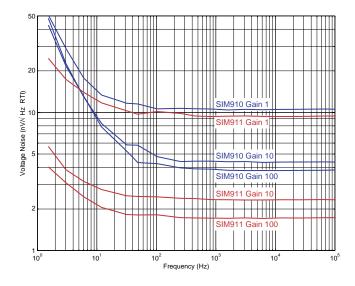







SIM911 rear panel

Fax. 044 825 34 01

## **Ordering Information**

SIM910 JFET preamplifier SIM911 BJT preamplifier

www.gmp.ch

GMP SA Main office: Avenue des Baumettes 17 CH -1020 Renens Tél. 021 633 21 21 Fax. 021 633 21 29 info@gmp.ch GMP SA Büro Zürich: Dübendorfstrasse 11a CH-8117 Fällanden Tel. 044 825 34 00 info@gmp.ch