



KT300

KT500

LightWAVE®

Industrial CO<sub>2</sub> Lasers



Laser

## Characteristics

- Liquid Cooled
- RF Excited
- Wide Operating Power Range
- Exceptional Power Stability
- Fast Rise and Fall Time
- Pulsed up to Quasi-CW Operation



## Standard Features

- Integrated Carry Handles
- Metal Sealed Laser Cavity
- Internally Collimated
- Integrated RF
- Common Footprint
- Overbuilt Electronics
- Three Point Mounting
- Manufactured in the USA

**LASER CHARACTERISTICS**

OUTPUT POWER <sup>1</sup>	≥300 watts	≥500 watts
POWER RANGE	20-300 watts	20-500 watts
TYPICAL PEAK POWER <sup>2</sup>	≥1200 watts	≥1200 watts
DUTY CYCLE RANGE	≤40%	≤70%
POWER STABILITY <sup>3</sup>	±6%	±6%
MAXIMUM PULSE ENERGY	>600 mJ	>1750 mJ
PULSE LENGTH	≤2.0 ms	≤3.5 ms
PULSE RISE/FALL TIME		30/50 μs
MODE QUALITY		M <sup>2</sup> < 1.2
BEAM ELLIPTICITY		<1.2
BEAM DIAMETER AT LASER OUTPUT		0.31" ±0.04" (8.0 mm ±1.0 mm)
BEAM DIVERGENCE (FULL ANGLE)		<2.5 mrad
POLARIZATION		Linear (parallel to baseplate)
MODULATION FREQUENCY		200 Hz to 200 kHz
WAVELENGTH		10.6 μm

**PHYSICAL CHARACTERISTICS**

WEIGHT	122 lbs. [55 kg]	
DIMENSIONS	47.25" x 10" x 10.1" [1200 x 254 x 257 mm]	

**ELECTRICAL REQUIREMENTS**

DC INPUT VOLTAGE	48 V	
DC PEAK CURRENT	230 A	
DC CONTINUOUS CURRENT	<100 A	<160 A


**COOLING REQUIREMENTS<sup>4</sup>**

HEAT LOAD	<5 kW	<8 kW
FLOW RATE	≥3 GPM (≥11.4 L/min)	
COOLANT MAXIMUM PRESSURE	90 PSI	
COOLANT	Distilled water with corrosion inhibitor	
COOLANT SETPOINT TEMP. RANGE	68°F - 77°F (20°C - 25°C)	
COOLANT TEMP. STABILITY (MAX)	±1°F (±0.5°C)	

**ENVIRONMENTAL CONDITIONS**

AMBIENT TEMP. RANGE	50°F - 100°F [10°C - 38°C]	
RELATIVE HUMIDITY	<95% non-condensing	
ALTITUDE	≤6500 ft. (2000 m)	

**MECHANICAL SPECIFICATIONS**

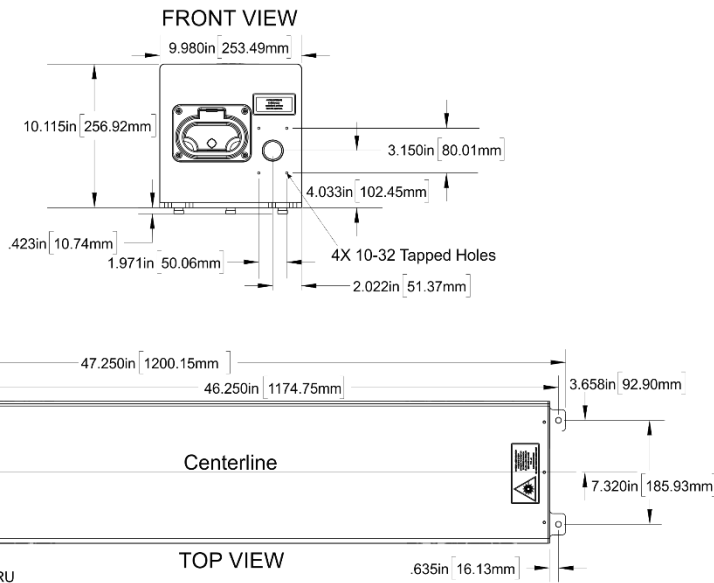

<sup>1</sup> Measured at maximum duty cycle and a 4 kHz pulse repetition frequency (PRF).  
<sup>2</sup> Measured at 10% duty cycle at 1 kHz PRF.  
<sup>3</sup> Power stability may not be met at low duty cycle or acoustic PRF.  
<sup>4</sup> Refer to the manual for details.

**Disclaimer**

The laser is a component of a laser system. It is the responsibility of the OEM to provide all required laser safety features. Check with CDRH for safety requirements. Do not operate laser without proper safety training. The laser parameters listed within this sheet are subject to change without notice.